


## HARO Sports Floors

Dominating the game.

### Protect Classic Plywood covered

Type: Area-elastic Protective Walls  
Usage: Sports and multi-purpose facilities

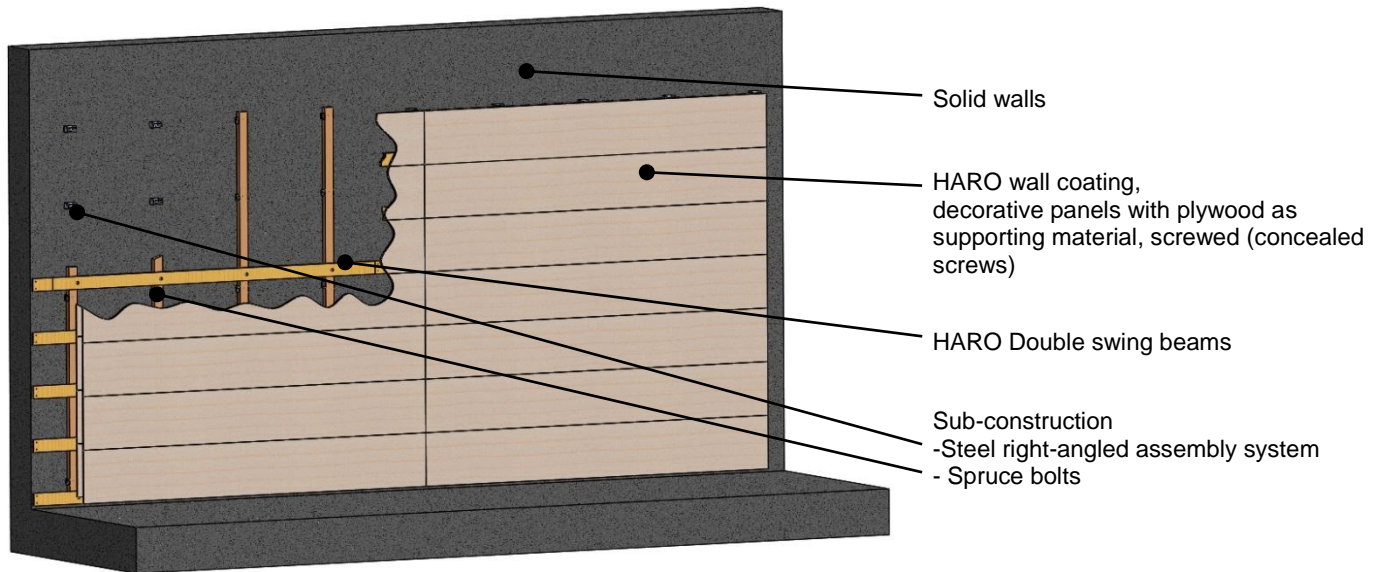

<b>Installation on an even wall surface according to DIN 18202, 1997-04, Chart 3</b>	<b>Model Protect Classic Plywood covered</b>
<b>HARO Sub-construction</b> Consisting of steel right-angled assembly system with spruce bolts or wood panel modules	up to 750 mm
<b>HARO Double swing beams</b> Made of plywood without elastic pads	39 mm
<b>HARO wall coating, made of plywood with decorative covering, sharp edges removed, screwed (concealed screws)</b> Standard length: 2.450mm Standard width: 400mm, 600mm, 1200mm	21 mm
<b>Construction height</b>	100 mm

PROTECT CLASSIC PLYWOOD COVERED protective walls meet the DIN 18032-1, April 2001, the DIN 18032-3, April 199, the safety information requirements of the Unfallkasse Sachsen \_Accident Insurance from Saxony\_ (GUV-SI 8468) and the DIN CERTCO certification program for protective walls.

