


HARO Sports Floors

Dominating the game.

Type: Area-elastic protective wall
Usage: Sports and multi-purpose facilities

Protect Glass VSG

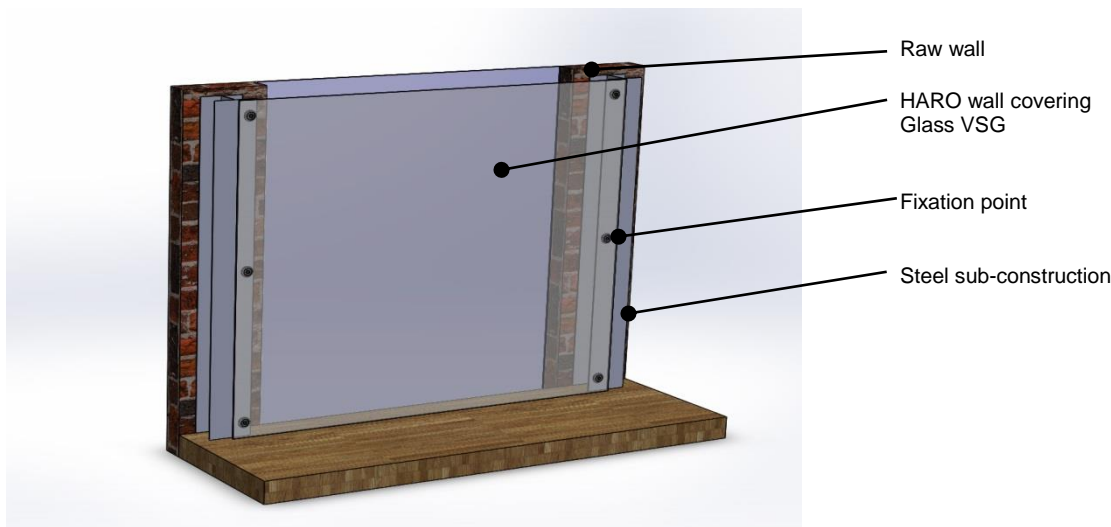

Installation on an even wall acc. to DIN 18202, 1997-04, chart 3	Model Protect Glass VSG
HARO sub-construction made of steel	
HARO glass fixation point	32 mm
HARO wall covering laminated safety glass	10 mm
Construction height	42 mm

Protective wall model PROTECT Glass VSG entirely meets the DIN 18032-1, April 2001 and the DIN 18032-3, April 1997 standards as well as all safety information requirements of Unfallkasse Sachsen (GUV-SI 8468).

