


HARO Sports Floors

Dominating the game.

Munich 35 F

Type: Area-elastic sports floor
Usage: Sports and multi-purpose facilities

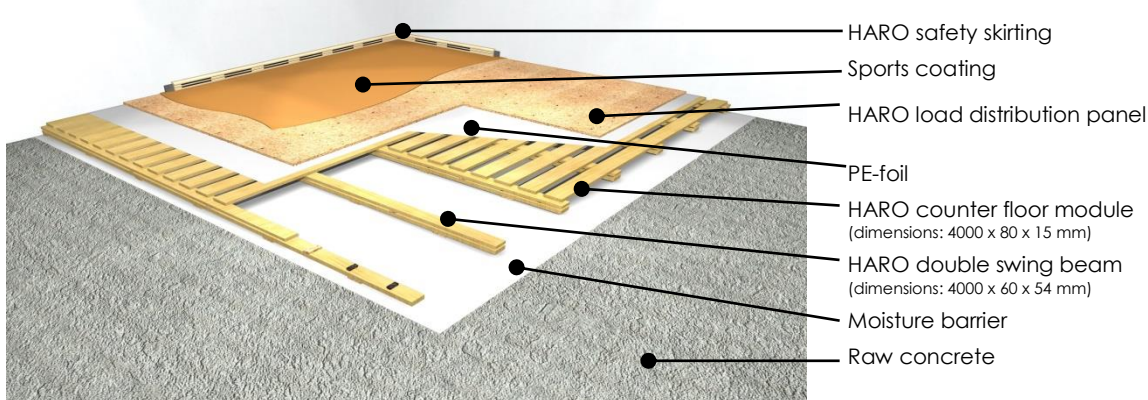

Underfloor
heating
compatible

| Installation from the top edge of raw concrete | Model Munich 35 F |
|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|-------------------|
| HARO double swing beam including dividers, shock absorption elements and support bearings laid out in longitudinal direction, made of spruce Distance centre to centre: 444 mm | 54 mm |
| HARO counter floor module nailed crosswise onto the double swing beam, made of spruce The spruce counter floor module is: <ul style="list-style-type: none"> • parallel hemmed • planed all-over • kiln dried Distance centre to centre: OSB board 119 mm / Plywood board 120 mm | 15 mm |
| PE-foil , 10% overlapped, laid out loosely | 0.03 mm |
| Load distribution panel screwed onto the counter floor Consisting of HARO OSB panels with building approval Dimensions: 2500 x 1250 mm | 12 mm |
| Construction height (without sports coating) | 81 mm |

Model MUNICH 35 F entirely meets and exceeds the EN 14904, DIN V 18032-2; April 2001 standards and is subject to the annual quality control RAL GZ 942.

