


HARO Sports Floors

Dominating the game.

Type: Area-elastic sports floor
Usage: Sports and multi-purpose facilities

Sydney 20

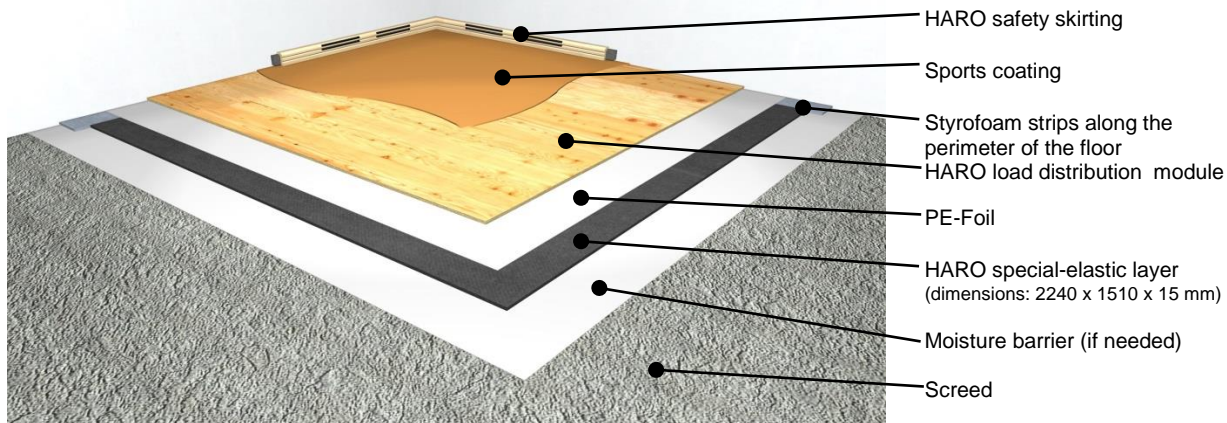

Underfloor heating compatible

Installation on an even sub-floor according to DIN 18202, 1997-04, chart 3, line 4	Model Sydney 20
HARO special elastic layer joints offset, laid out loosely	15 mm
PE-Foil 10 % overlapped, laid out loosely	0.2 mm
HARO load distribution module consisting of: <ul style="list-style-type: none"> Special-plywood boards, BFU 100 acc. to DIN 68705, part 3 Dimensions: 1220 x 2470 x 15 mm 	15 mm
Construction height (without sports coating)	30 mm

The model Sydney 20 meets and exceeds the DIN V 18032-2; April 2001 and EN 14904 standards and is subject to the annual quality control RAL-GZ 942

