


# HARO Sports Floors

Dominating the game.

Type: Area-elastic sports floor  
Usage: Sports and multi-purpose facilities  
ideal for renovations

## HELSINKI 50

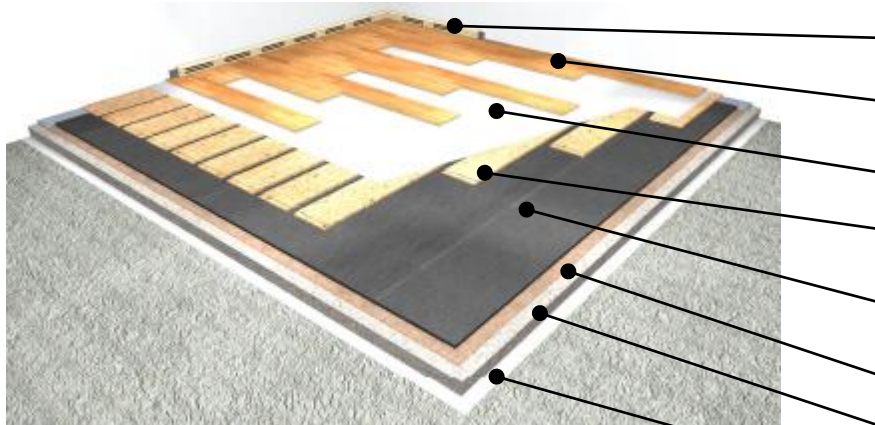

- HARO safety skirting
- HARO sports parquet Premium (dimensions: 2200 x 180 x 15.0 mm)
- PE-foil
- HARO load distribution module (dimensions: 2500 x 175 x 12 mm)
- HARO elastic layer (dimensions: 2000 x 1500 x 10 mm)
- Insulation
- Dry screed
- Seal



Underfloor heating compatible

<b>Installation on an even sub-floor according to DIN 18202: 1997-04 chart 3, line 4 or on raw concrete with dry screed</b>	Model Helsinki 50
<b>HARO elastic layer</b> joints offset, laid out loosely	10 mm
<b>HARO load distribution module</b> Special plywood panel strips, front-end (175 mm) tongue and groove joints, BFU 100 according to DIN 68705, part 3 Dimensions: 2500 x 175 mm	12 mm
PE-foil, 10% overlapped, laid out loosely	0.03 mm
<b>HARO sports parquet</b> Premium stapled onto load distribution modules Solid wood top layer 5.6 mm Factory finished with a highly wear resistant PERMADUR® sealing	15.0 mm
<b>Construction height</b>	37 mm

The HELSINKI 50 model entirely meets and exceeds the EN 14909, DIN V 18032-2; April 2001 standards.

