


HARO Sports Floors

Dominating the game.

Helsinki Eco

Type: Area-elastic sports floor
Usage: Sports and multi-purpose facilities

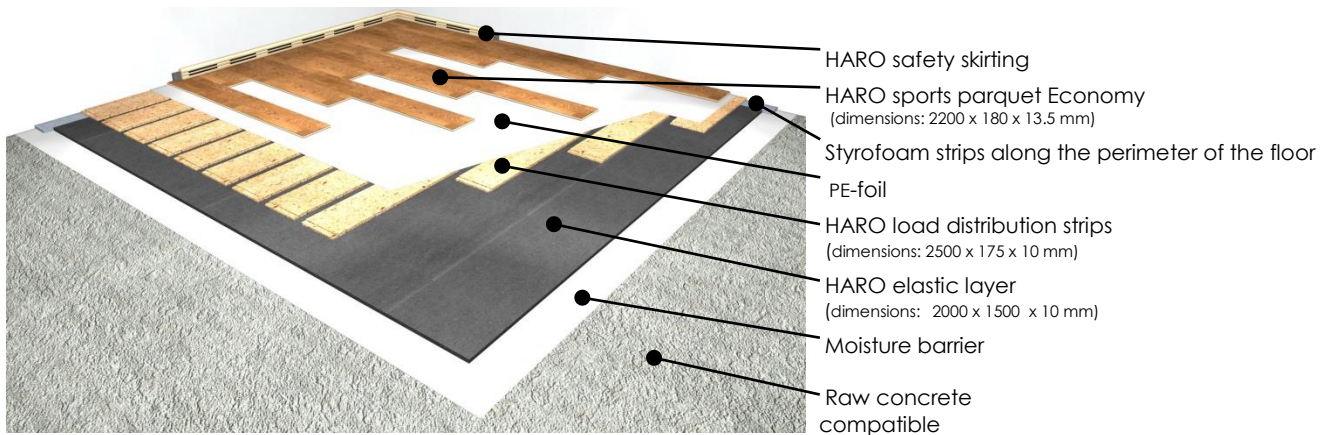

Installation from the top edge of raw concrete	Model Helsinki Eco
HARO special elastic layer , joints offset, laid out loosely	10 mm
HARO load distribution strips OSB4-strips with building approval, tongue and groove joints	12 mm
PE-foil , 10% overlapped, laid out loosely	0.03 mm
HARO Sports Parquet Economy Tongue and groove gluing, stapled onto the load distribution strips Solid wood top layer 3.5 mm Factory finished with a highly wear resistant PERMADUR® sealing	13.5 mm
Construction height	35.5 mm

Model HELSINKI Eco entirely meets and exceeds the FIBA rules 2010, DIN V 18032-2; April 2001 standards and is subject to the annual quality control RAL GZ 942.

