


HARO Sports Floors

Dominating the game.

MELBOURNE 65

Type: Area-elastic sports floor
Usage: Squash and racket sports

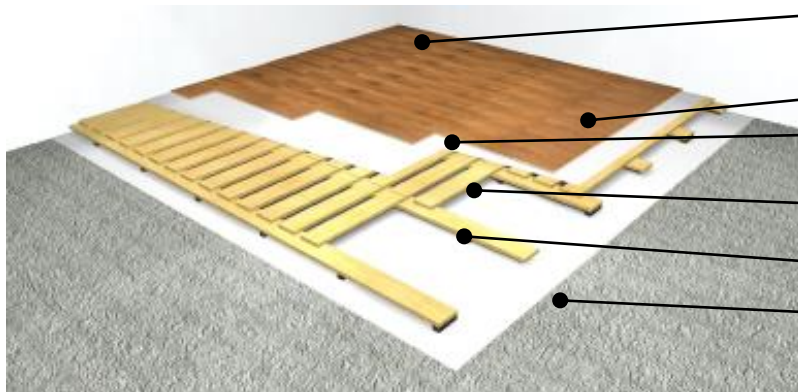

HARO sports parquet premium
(dimensions: 2200 x 180 x 12.6 mm)

PE-foil

HARO counter floor
(dimensions: 4000 x 96 x 17 mm)

HARO elastic beam
(dimensions: 4000 x 96 x 27 mm)

Moisture barrier

Raw concrete



Underfloor heating compatible

Installation from the top edge of raw concrete	Model Melbourne 65
HARO elastic beam consisting of a spruce wooden beam with pads, distance centre to centre: 500 mm Laid out in longitudinal direction of the hall	27 mm
HARO counter floor is nailed crosswise onto the HARO elastic beam Distance centre to centre: 137 mm The spruce is: <ul style="list-style-type: none"> • kiln dried • planed all over • parallel hemmed 	17 mm
PE-foil, 10% overlapped, laid out loosely	0.03 mm
HARO Sports Parquet Premium Stapled onto the HARO counter floor Solid hardwood top layer 3.6 mm Slip resistant SST surface with special polish and depth impregnation	12.6 mm
Construction height	56.6 mm

Model Melbourne 65 meets the WSF (World Squash Federation) requirements and is WSF accredited.

